


TECHNICAL DATA

TANDEM ROLLERS

BW 90 AD-5, BW 100 ADM-5



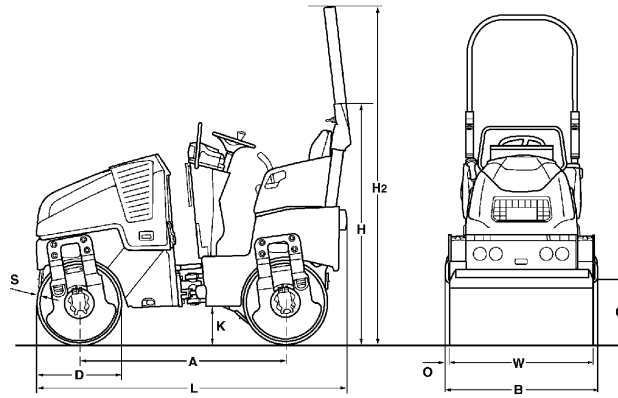

Dimensions in inch

	A	B	C	D	H	H2	K	L	O	S	W
BW 90 AD-5	58.4	37.6	17.0	22.8	64.1	90.7	10.0	86.4	1.1	0.47	35.4
BW 100 ADM-5	58.4	41.6	17.0	22.8	64.1	90.7	10.0	86.4	1.1	0.47	39.4

Shipping dimensions in cub.yd

BW 90 AD-5
BW 100 ADM-5

without ROPS

4,463
4,937

with ROPS

6,314
6,986

Machine type	Compaction output (cub.yd/h) at recommended soil layer thicknesses		
	Gravel, sand	Mixed soil	Silt, clay
BW 90 AD-5	91.6-157.0	58.9-117.7	45.8-91.6
BW 100 ADM-5	98.1-183.1	65.4-130.8	47.1-91.6

Machine type	Compaction output (t/h) at different asphalt layer thicknesses		
	0.8-1.6 in	2.4-3.1 in	3.9-5.5 in
BW 90 AD-5	19.6-39.2	39.2-65.4	52.3-104.6
BW 100 ADM-5	19.6-52.3	45.8-78.5	65.4-117.7

Technical Data**BOMAG
BW 90 AD-5****BOMAG
BW 100 ADM-5****Weights**

Operating weight CECE	lb	3,527	3,748
Average static linear load CECE	lb/in	49.8	47.6
Grossweight	lb	4,189	4,189

Dimensions

Working width	in	35.4	39.4
Track radius, inner	in	79.9	78.0

Driving Characteristics

Speed	mph	0- 6.2	0- 6.2
Working speed with vibration	mph	0- 6.2	0- 6.2
Max. gradeability without/with vibr.	%	40/30	40/30

Drive

Engine manufacturer		Kubota	Kubota
Type		D 902	D 902
Emission stage		Stage V / TIER4f	Stage V / TIER4f
Cooling		water	water
Number of cylinders		3	3
Performance ISO 14396	hp	20.2	20.2
Performance SAE J 1995	hp	20.2	20.2
Speed	rpm	3,000	3,000
Speed adjustment 1	rpm	2,100	2,100
Speed adjustment 2	rpm	3,000	3,000
Electric equipment	V	12	12
Driven drum		front + rear	front + rear

Brakes

Service brake		hydrost.	hydrost.
Parking brake		hydromec.	hydromec.

Steering

Steering system		oscil.artic.	oscil.artic.
Steering method		hydrost.	hydrost.
Steering / oscillating angle +/-	deg	33/8.0	33/8.0
Crab walk	in	0- 2.0	0- 2.0

Exciter system

Vibrating drum		front + rear	front + rear
Drive system		hydrost.	hydrost.
Frequency	vpm	2,520.0/3,780.0	2,520.0/3,780.0
Amplitude	in	0.020	0.016
Centrifugal force	lb	1,776/3,867	1,776/3,867

Sprinkler System

Type of sprinkling		pressure	pressure
--------------------------	--	----------	----------

Capacities

Fuel	gal	7.9	7.9
Water	gal	26.4	26.4

Technical modifications reserved. Machines may be shown with options.

Standard Equipment

- Hydrostatic travel and vibration drive
- Travel drive in series
- 2 scrapers per drum, spring loaded and tiltable
- Pressure sprinkler system with interval switch
- Multi function travel lever
- Multi-function display incl. operating hour meter
- Water level
- Emergency STOP
- Individual control, vibration
- Intelligent Vibration Control (IVC)
- Integrated storage compartment
- Adjustable operator's seat
- Seat contact switch
- Vandalism protection
- 12V socket
- Working lights front and rear
- Back-up alarm
- Lashing eyes, galvanized
- Single point lifting device
- Lockable engine hood made of composite material

Optional Equipment

- ROPS with safety belt
- * Foldable ROPS incl. seat belt
- Sun roof, foldable with ROPS
- Double travel lever
- Seat heating
- ECONOMIZER with asphalt temperature display
- Temperature display
- BOMAG TELEMATIC
- Theft protection
- Indicator and hazard lights
- Rotary beacon
- Optional lighting on ROPS
- Battery disconnect switch
- Environmentally compliant hydraulic oil
- Special painting
- Edge cutter
- Port for hydraulik breaker
- Backup warning buzzer with broadband technology
- ECOSTOP
- Outside mirrors
- Anti-frost intake
- Tablet holder set
- JOBLINK measuring technology interface
- JOBLINK Bluetooth adapter
- BOMAP GPS antenna holder

* Standard delivery with CE conformity
(valid within European Union)



PRUS 462 00 010

080922 Sa06

BOMAG Americas, Inc.
125 Blue Granite Parkway
Ridgeway, SC 29130
USA
Tel. +1 803 3370700
Fax +1 803 3370800
www.bomag.com/us

